



MODEL	TU17	TU28	TU32
Nominal capacity	2,000 lbs. for material handling 1,500 lbs. for man-riding	4,000 lbs. for material handling 3,000 lbs. for man-riding	8,000 lbs. for material handling 6,000 lbs. for man-riding
Wire rope dia.	$\frac{5}{8}$ in. (8.4 mm)	$\frac{3}{4}$ in. (11.5 mm)	$\frac{1}{2}$ in. (16.3 mm)
Effort on control lever	Forward	79 lbs. (36 kg)	119 lbs. (54 kg)
	Reverse	40 lbs. (18 kg)	44 lbs. (20 kg)
Rope travel per stroke	Forward	2 in. (50 mm)	$2\frac{1}{4}$ in. (56 mm)
	Reverse	$2\frac{1}{2}$ in. (60)	$2\frac{3}{4}$ in. (70 mm)
Min. wire rope breaking strength	10,000 lbs. (4,500 kg)	20,000 lbs. (9,000 kg)	40,000 lbs. (18,000 kg)
DIMENSIONS	A	10 $\frac{1}{8}$ in. (270 mm)	12 $\frac{3}{16}$ in. (325 mm)
	B	1 $\frac{1}{4}$ in. (32 mm)	1 $\frac{1}{2}$ in. (38 mm)
	C	1 $\frac{3}{16}$ in. (30 mm)	1 $\frac{1}{8}$ in. (30 mm)
	D	1 $\frac{1}{8}$ in. (40 mm)	1 $\frac{1}{8}$ in. (48 mm)
	E	20 $\frac{1}{8}$ in. (530 mm)	26 in. (660 mm)
	F	15 $\frac{1}{8}$ in. (397 mm)	19 in. (483 mm)
	G	2 $\frac{1}{4}$ in. (70 mm)	3 $\frac{3}{8}$ in. (85.5 mm)
	H	7 $\frac{1}{16}$ in. (194.5 mm)	9 $\frac{9}{16}$ in. (236 mm)
	I	2 $\frac{5}{16}$ in. (58 mm)	3 $\frac{1}{8}$ in. (80 mm)
	J	1 $\frac{1}{4}$ in. (28 mm)	1 $\frac{1}{4}$ in. (31 mm)
	K	11 $\frac{1}{4}$ in. (285 mm)	14 $\frac{1}{8}$ in. (360 mm)
	L	4 $\frac{1}{8}$ in. (110 mm)	5 $\frac{1}{8}$ in. (145 mm)
	M	17 $\frac{1}{16}$ in. (455 mm)	25 $\frac{1}{8}$ in. (645 mm)
	N	28 $\frac{1}{16}$ in. (735 mm)	45 $\frac{1}{4}$ in. (1,150 mm)
Wire rope weight	8 lbs./30 ft. (3.6 kg/9 m)	28.9 lbs./60 ft. (13 kg/18 m)	8 lbs./30 ft. (3.5 kg/9 m)
Unit weight	18.7 lbs. (8.4 kg)	41 lbs. (18.6 kg)	64 lbs. (29 kg)

griphoist®/tirfor® TU17

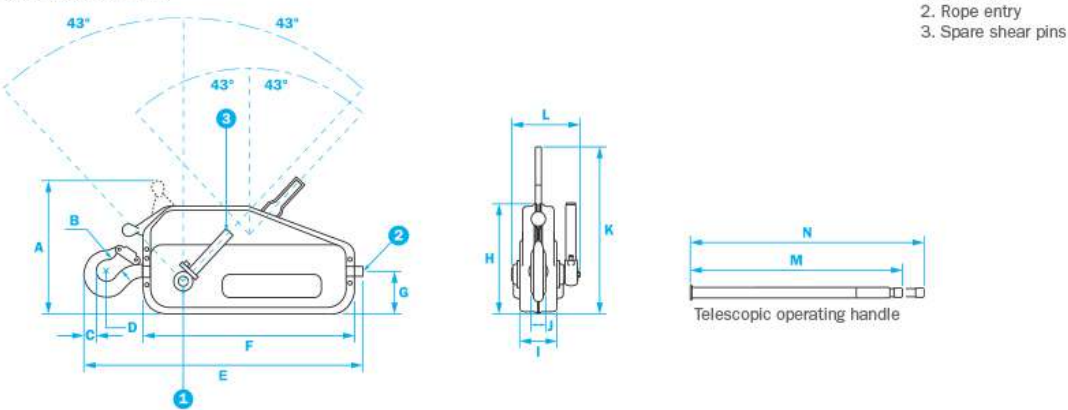

griphoist®/tirfor® TU28

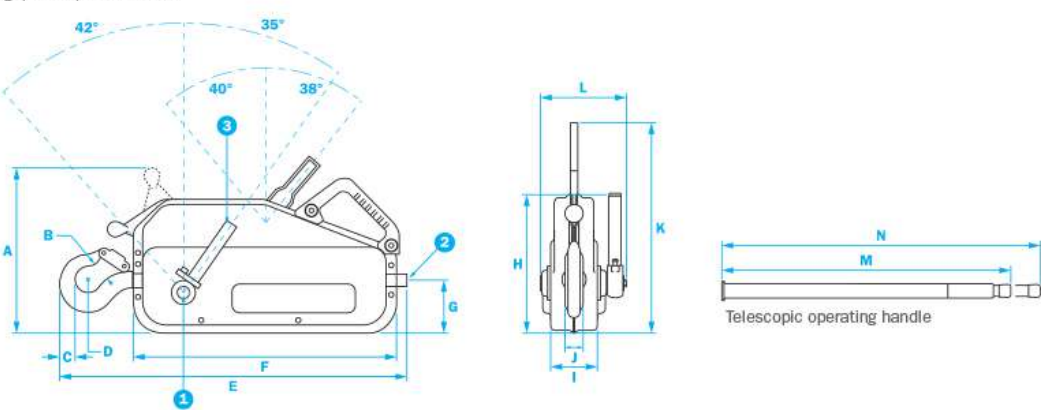

griphoist®/tirfor® TU32

